

INDUSTRIAL HIGH TEMPERATURE CARTRIDGE HOUSINGS



Pentair* Industrial* High Temperature Cartridge Housings are constructed of glass-reinforced nylon and provide an economical alternative to stainless and carbon steel housings.

FEATURES/BENEFITS

Flow rates up to 20 gpm (76 Lpm)

Withstands temperatures up to 165°F
(73.9°C)

Durable glass-reinforced nylon
construction

Excellent chemical compatibility

Excellent alternative to stainless
and carbon housings

#241 O-ring for dependable sealing

APPLICATIONS**

Alcohol

Organic Solvents

Petroleum

Sea Water

Vegetable Oils

OPTIONS

Available in 0.5" NPT Slim Line
and 0.75" NPT Standard housings

Available in 10" and 20" lengths

*** Not to be used with ketones*


DIMENSIONS

Housing	Glass-reinforced nylon
Cap	Glass-reinforced nylon
O-ring	Slim Line Housings - FKM Standard Housings - Silicone
Max. Temperature	165°F (73.9°C)
Max. Pressure	125 psi (8.62 bar)

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.

MODEL	INLET/ OUTLET SIZE (IN.)	MAXIMUM DIMENSIONS	INITIAL ΔP (PSI) @ FLOW RATE (GPM)
#10 Standard	.75"	12.125" x 5.125" (308 mm x 130 mm)	<1 PSI @ 8 gpm (<0.1 bar @ 30 Lpm)
#20 Standard	.75"	22.25" x 5.125" (565 mm x 130 mm)	<1 PSI @ 8 gpm (<0.1 bar @ 30 Lpm)
#10 Slim Line	.5"	11.75" x 4.375" (298 mm x 111 mm)	5 PSI @ 8 gpm (<0.4 bar @ 30 Lpm)

PRESSURE DROP VS FLOW RATE

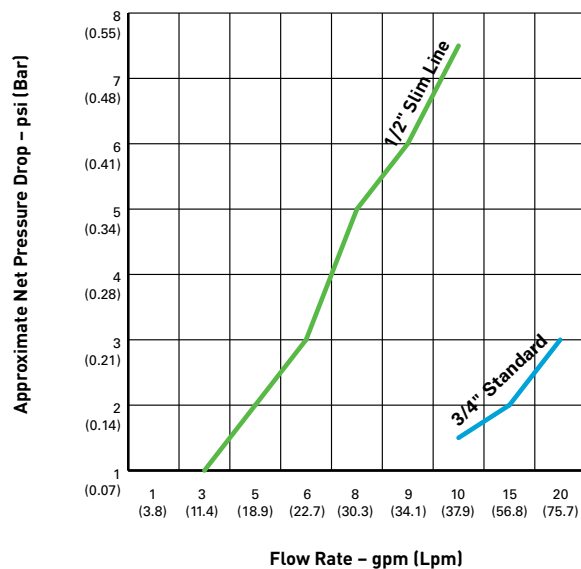

WATER QUALITY SYSTEMS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209
P: 262.238.4400 | F: 262.238.4404

PENTAIRINDUSTRIAL.COM

CUSTOMER CARE: 800.279.9404 | tech-support@pentair.com

© 2015 Pentair Residential Filtration, LLC. All rights reserved.

*For a detailed list of where Pentair trademarks are registered, please visit waterpurification.pentair.com.

Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners.

4003025 Rev E JE15